

SK | Secondary connector kit - EMA



Uses

Secondary connector kits are used for creating a detachable watertight connection between the secondary series circuit cables and either the secondary winding of the series transformer or the light.

Features



- Kits available for different cables diameters.
- Connector kits cover all currently available airfield lighting cables.
- Connectors are resistant to abrasive chemicals and all weather conditions.
- Excellent watertightness.
- Plugs and receptacles can also be factory moulded to cable leads.


Secondary connectors

- Single conductor: for one cable 2x2,5mm² up to 2x4mm² (SK-1)
- Two conductor: for two cables 1x2,5mm² up to 2x4mm², each (SK-2)

SECONDARY CONNECTOR KIT		
	SINGLE CONDUCTOR	TWO CONDUCTOR
PLUG	Class B, Type II, Style 5	Class B, Type II, Style 4
RECEPTACLE	Class B, Type II, Style 12	Class B, Type II, Style 11

SK | Secondary connector kit - EMA

Order Code

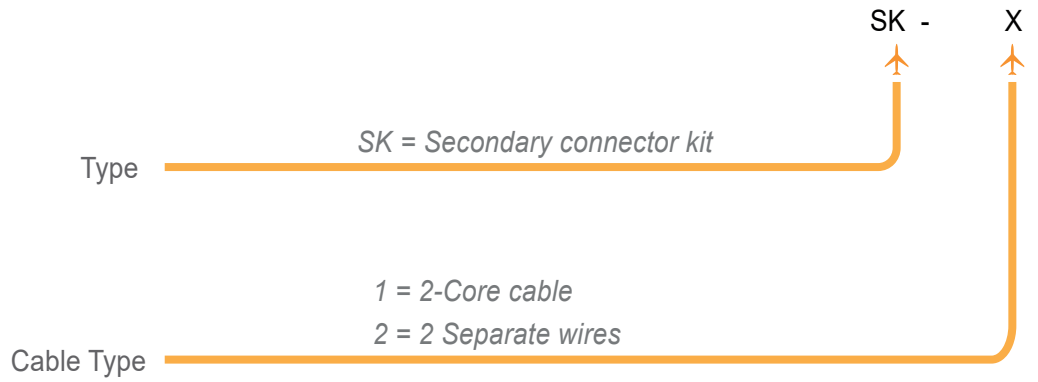

Secondary connector kit for single conductor



Secondary connector kit "SK-1" in application



Secondary connector kit for two conductor



Secondary connector kit "SK-2" in application